




XE910-2G Industrial Terminal

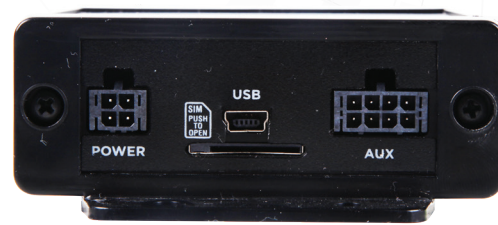

Product	XE910-2G
2G bands (MHz)	850 / 900 / 1800 / 1900
Supply Voltage Range	9-35VDC @ 1.2A min
Battery	Li-Ion 3.7V 960mAh (Optional)
RS-232 Interface	D-sub 9-pole female socket
USB Interface	USB 2.0 (Mini B)
GPIO Interface	"RS485 - Transceiver with AutoDirection Control 2 Output (Relay Driver Max 12V @ 150mA) 2 Input (Optical isolator 9-24V DC) 1 Analog Input (0-5V DC)"
Cellular Antenna Connector	SMA (female)
Sim Card Holder	Push Push Type
Operating Status LED's	Power / Status
Software	"Python* script interpreter 2.7.2 application resources (Memory: 2 MB Ram , 2 MB Flash) AppZone application resources Programming language (C) , IDE (Eclipse) , Memory: 5 MB Ram , 2 MB Flash"
Dimension	85 x 80 x 30 mm
Weight	140 grams (without battery)
Extended Temperature Range	-40°C to +85°C (Operational)