

Quectel BC95-G

Multi-band NB-IoT Module with Ultra-low Power Consumption



BC95-G is a high-performance NB-IoT module which supports multiple frequency bands of B1/B3/B8/B5/B20/B28 with extremely low power consumption. The ultra-compact 23.6mm × 19.9mm × 2.2mm profile makes it a perfect choice for size sensitive applications. Designed to be compatible with Quectel GSM/GPRS M95 module in the compact and unified form factor, it provides a flexible and scalable platform for migrating from GSM/GPRS to NB-IoT networks.

BC95-G adopts surface mounted technology, making it an ideal solution for durable and rugged designs. The low profile and small size of LCC package allow BC95-G to be easily embedded into space-constrained applications and provide reliable connectivity with the applications. This kind of package is ideally suited for large-scale manufacturing which has strict requirements for cost and efficiency.

Due to compact form factor, ultra-low power consumption and extended temperature range, BC95-G is the best choice for a wide range of IoT applications, such as smart metering, bike sharing, smart parking, smart city, security and asset tracking, home appliances, agricultural and environmental monitoring, etc. It is able to provide a complete range of SMS* and data transmission services to meet client-side demands.



Key Benefits

- ✓ Compact-sized multi-band NB-IoT module
- ✓ Ultra-low power consumption
- ✓ Super high sensitivity
- ✓ LCC package makes it easy for large volume manufacturing
- ✓ Compatible with Quectel GSM/GPRS module, easy for future upgrading
- ✓ Embedded with abundant Internet service protocols
- ✓ Fast time-to-market:
Reference designs, evaluation tools and timely technical support minimize design-in time and development efforts



Compact Size



B1/B3/B8/B5/
B20/B28



Extended Temperature
Range: -40°C ~ +85°C



LCC Package



Multiple Serial
Ports



Ultra-low Power
Consumption




Quectel Enhanced
AT Commands



Embedded Internet
Services Protocols

Quectel BC95-G

Multi-band NB-IoT Module with Ultra-low Power Consumption

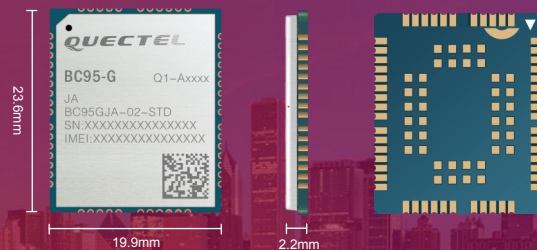

Frequency Bands

BC95-G:

B1 @H-FDD: 2100MHz
B3 @H-FDD: 1800MHz
B8 @H-FDD: 900MHz
B5 @H-FDD: 850MHz
B20 @H-FDD: 800MHz
B28 @H-FDD: 700MHz

Data

Data Transmission:

Single Tone:

DL: 24kbps
UL: 15.625kbps

Multi Tone*:

UL: 62.5kbps
DL: 24kbps

Protocol Stacks:

IPv4
IPv6*
UDP
CoAP
LwM2M*
Non-IP
DTLS*

Download Method:

UART
DFOTA*

SMS*

Point-to-point MO and MT
Text/PDU Mode

Electrical Characteristics

Maximum Output Power:

23dBm±2dB

Sensitivity:

-129dBm±1dB

Power Consumption (Typical) :

PSM: 3uA
Idle Mode: 2mA @DRX=1.28s

LTE Cat NB1 Connectivity:

230mA @23dBm

Interfaces

USIM × 1: Supports 1.8V/3.0V USIM Card
UART × 2
ADC* × 1
RESET × 1
Antenna × 1

General Features

LCC Package
94 Pins
Supply Voltage Range:
3.1V~4.2V, 3.6V Typ.
Temperature Range:
-40°C ~ +85°C
Dimension:
23.6mm × 19.9mm × 2.2mm
Weight:
1.8g±0.2g
AT Command:
3GPP TS 27.007 V14.3.0 (2017-03) and Quectel
Enhanced AT Commands

Approvals

RoHS Compliant
CCC*/NAL*/SRRC* (China)
CE*/GCF* (Europe)
FCC* (North America)

* Under Development